

# Field Measurement

## VERIFY BEFORE TRAVELING TO SITE


- Confirm stub walls and returns are final and not subject to change
- Confirm wall finishes (drywall, backer, tile, paint, rails, etc.)
- Confirm framing is complete
- Confirm backing has been installed
- Confirm door swings and clearances
- Confirm no pending layout changes

## FIELD MEASUREMENTS

- Measure overall wall-to-wall at pilaster connection point
- Measure toilet centers
- Measure alcove width & depth
- Measure stub walls, bump-outs, or recesses
- Check walls for plumb
- Check for excessive floor slope
- Note obstructions and/or encroachments (soffits, light fixtures, sprinklers, columns, etc)

## REVIEW BEFORE RELEASE FOR FABRICATION

- Compare/adjust fabrication drawings to account for field measurements
- Confirm/adjust panel & door sizes
- Confirm required ADA clearances
- Confirm colors
- Confirm payment terms and lead time with supplier

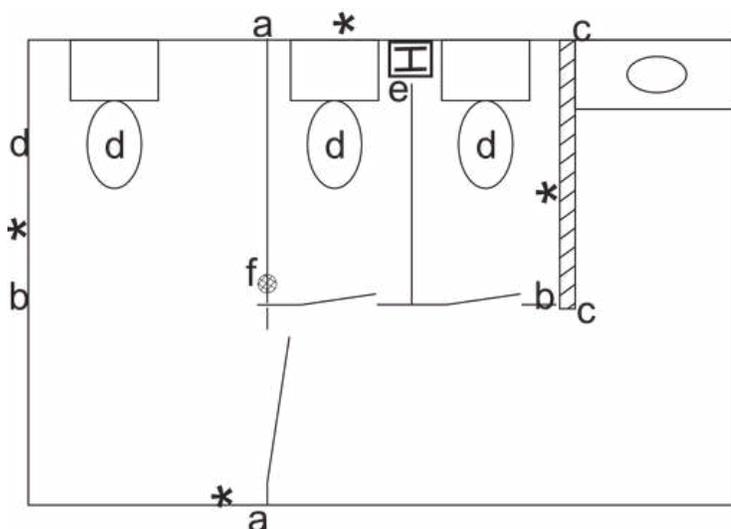

### Measurement Key

- a** Wall-to-wall (length)
- b** Wall-to-wall (depth)
- c** Stub wall length
- d** Toilet center from finished wall
- e** Encroachment (column, chase, projection)
- f** Floor drain (confirm clear of layout)
- \*** Plumb check locations