
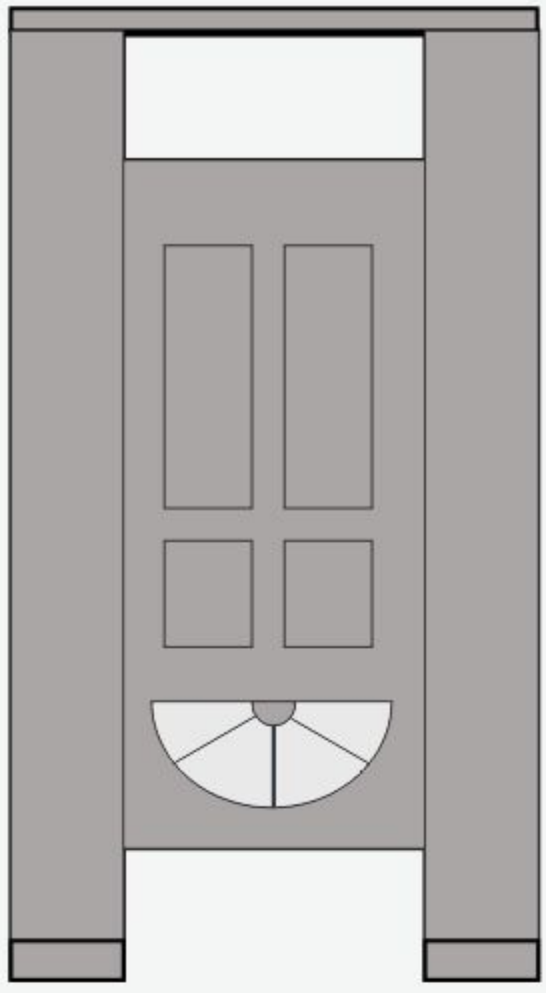



Beautiful Toilet Partitions Deserve Careful Installation

8 Common Installation Issues and How to Avoid Them

Labels Not Removed
Inspect all components
and remove any remaining
labels or peel coat before
leaving.



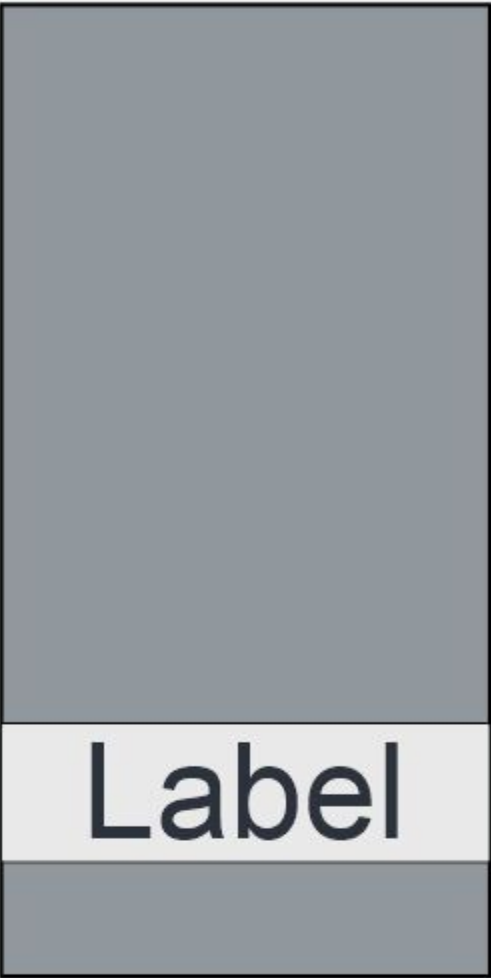


Doors Upside Down
Watch the labels. They
are placed toward the
bottom for proper
orientation.

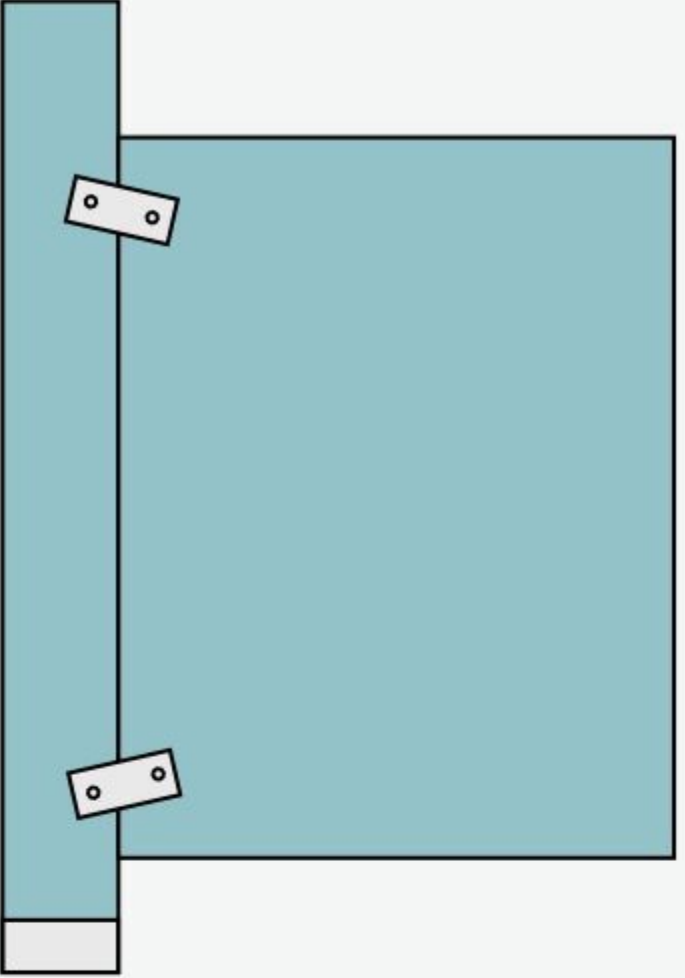


Alcove Clips Not Level
Loosely fasten one side
of the alcove clip. Level
with a torpedo level, then
install the second
fastener. Tighten all
fasteners.

**Occupancy Indicator
Misaligned**
Set latch to fully open or
closed. Confirm full green or
red. Adjust as required.

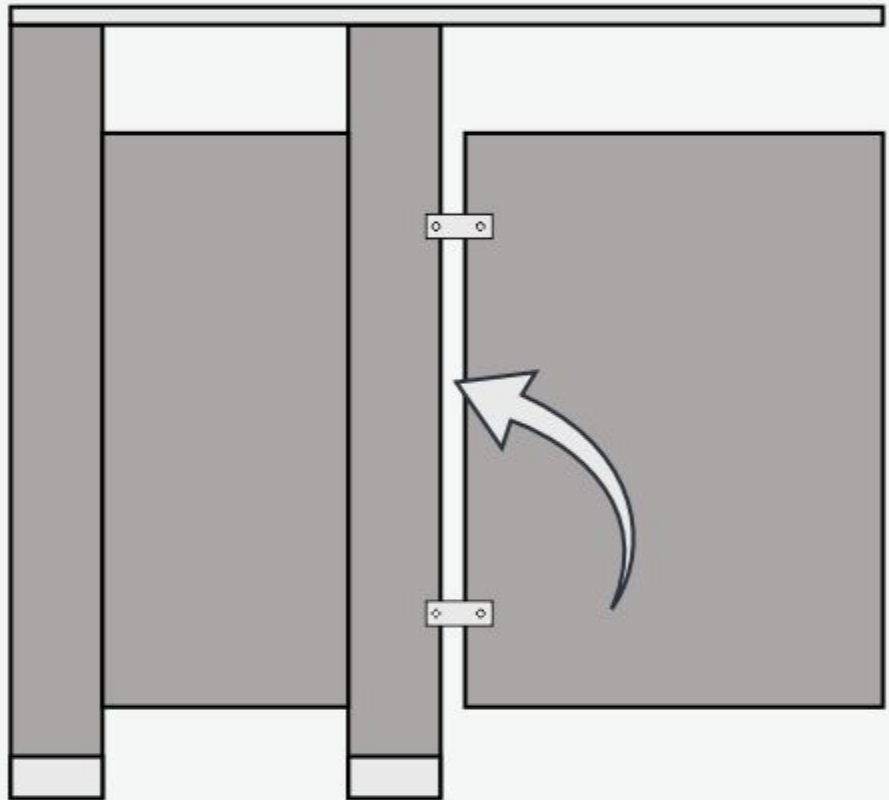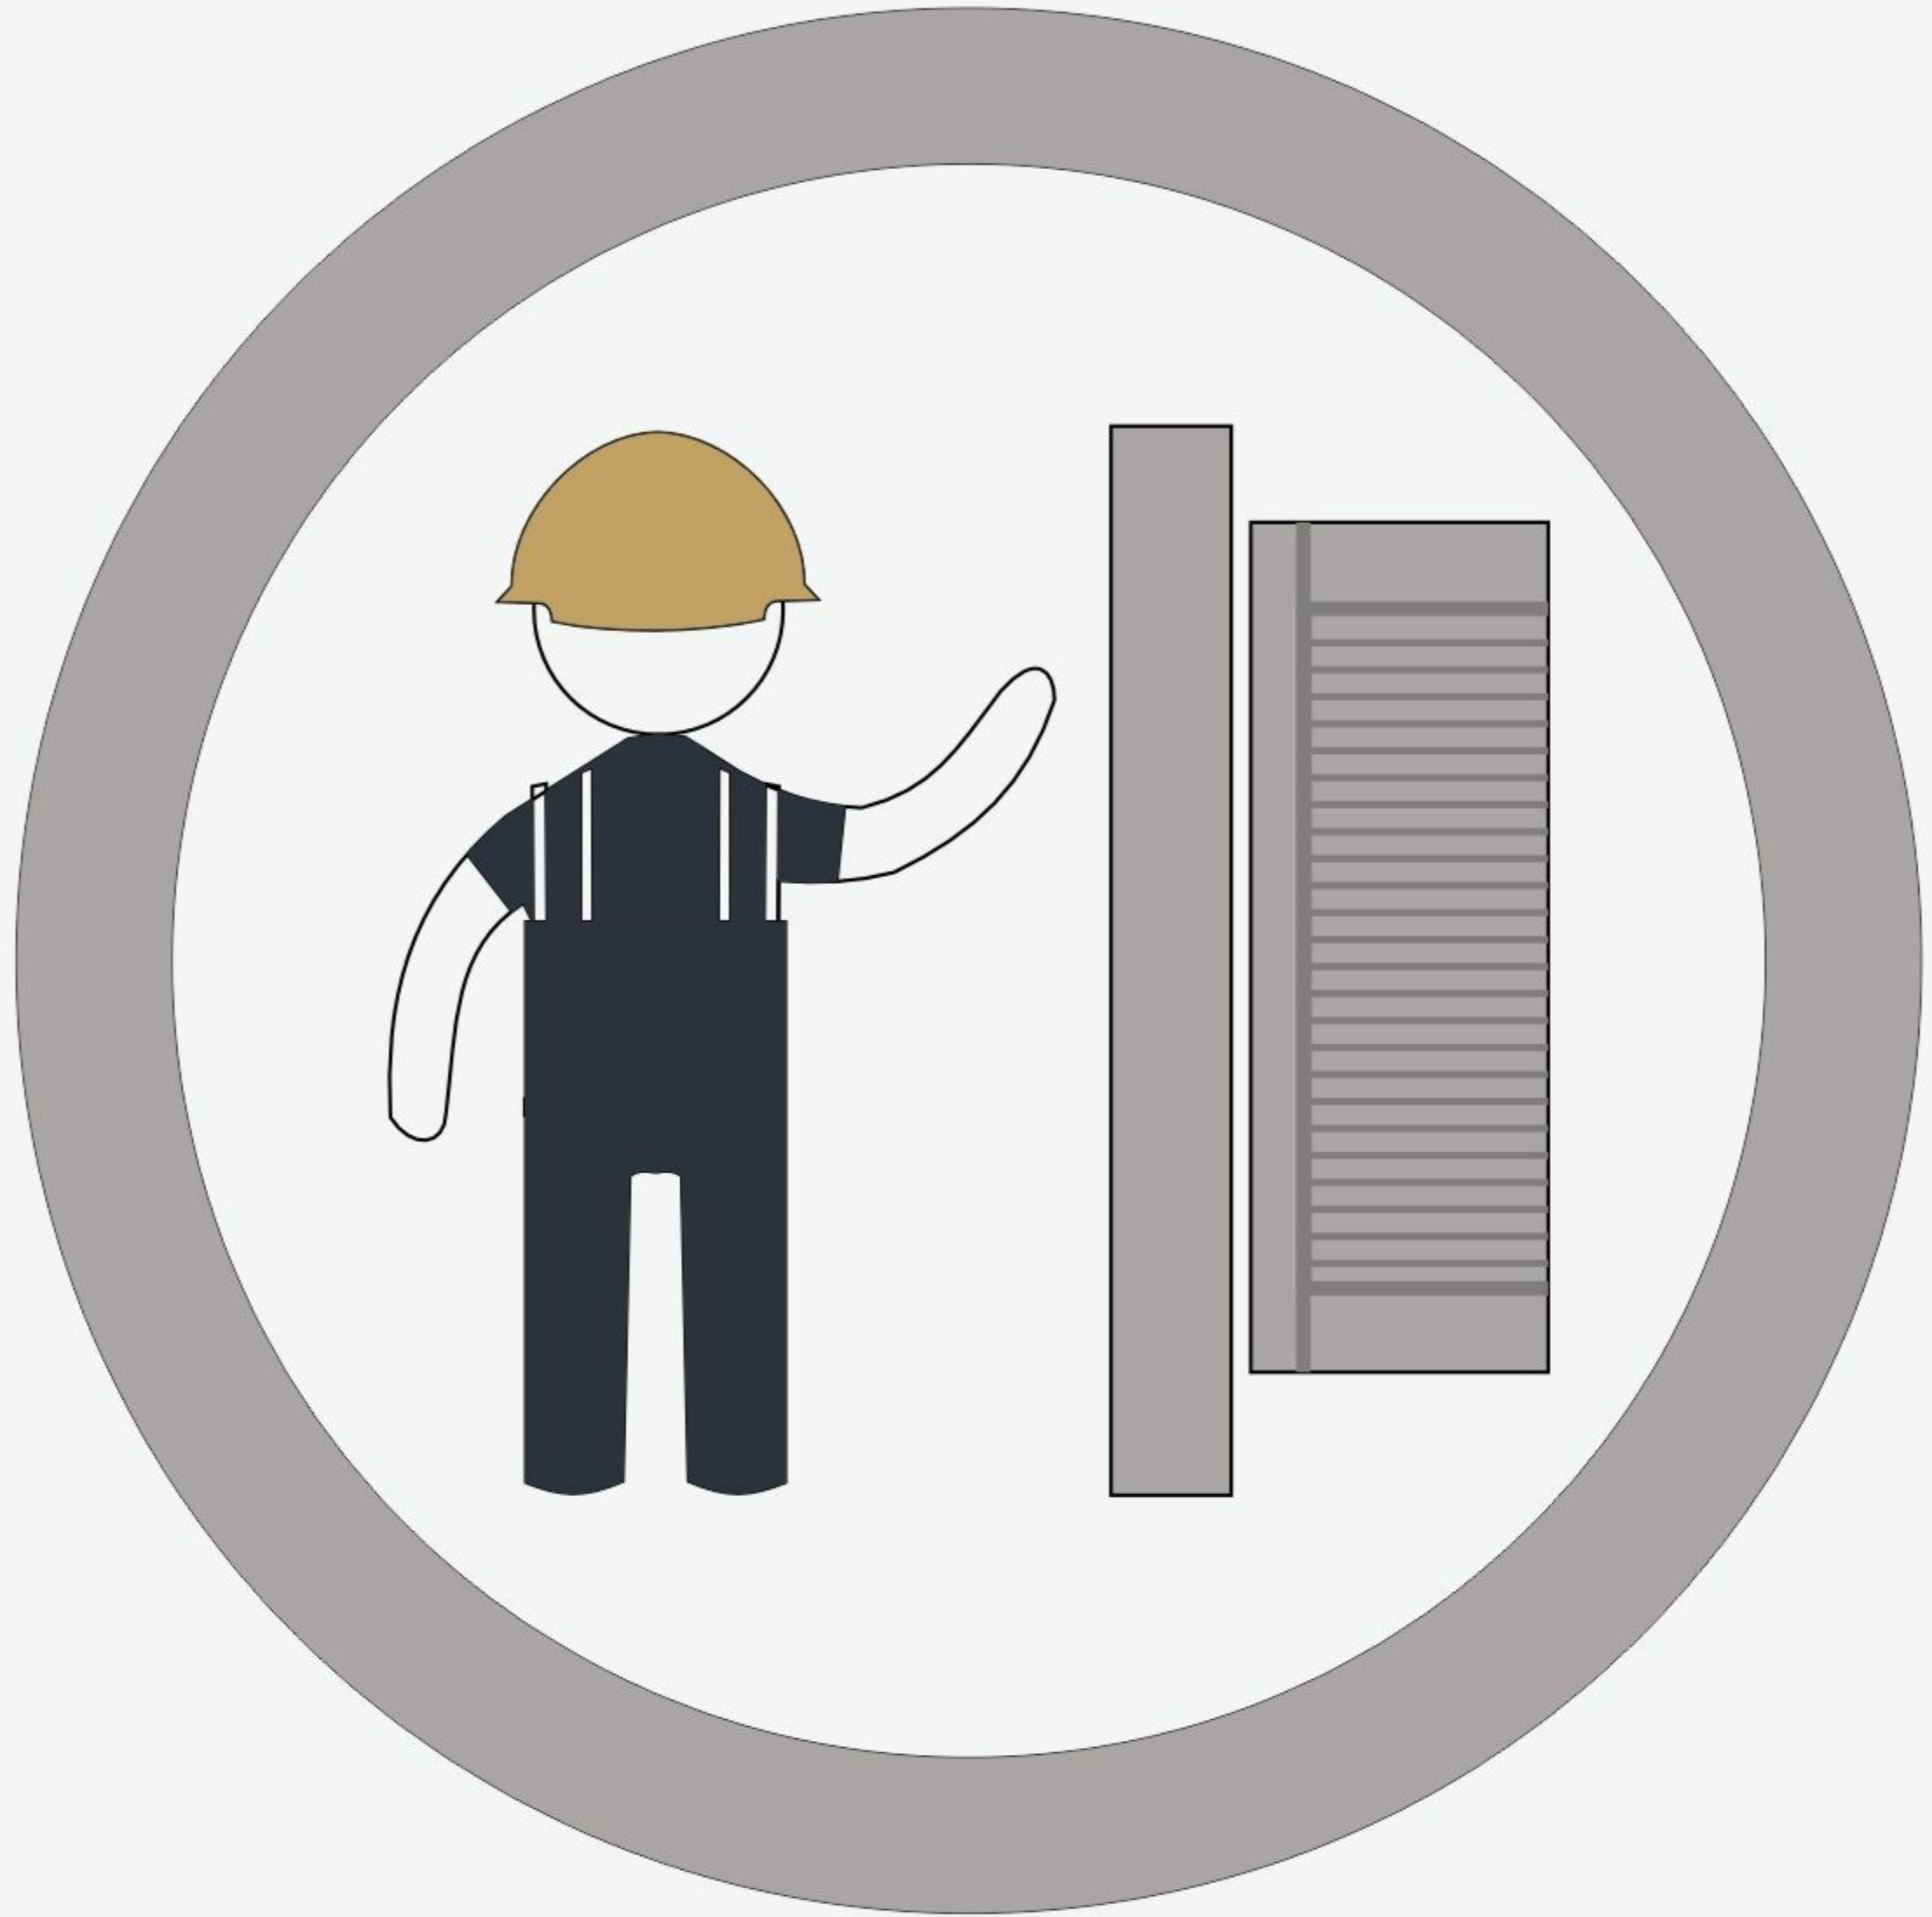
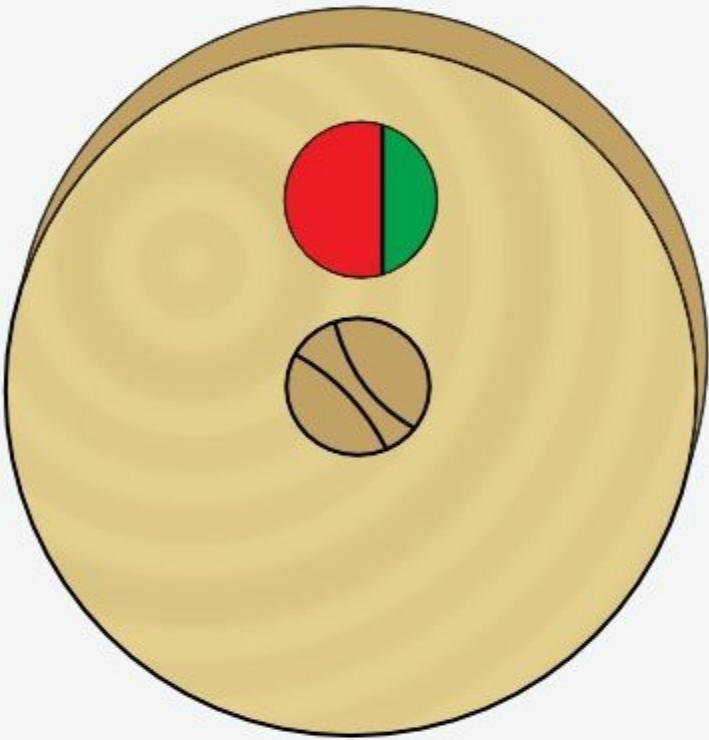


Gap at Alcove
Layout alcoves on the
floor before
installation. Ensure the
pilaster to
panel gap is tight.
Increase wall gaps if
needed.

Missing Headrail
The return headrail is not
structural, but the stall looks
unfinished without it. Install
the return headrail.

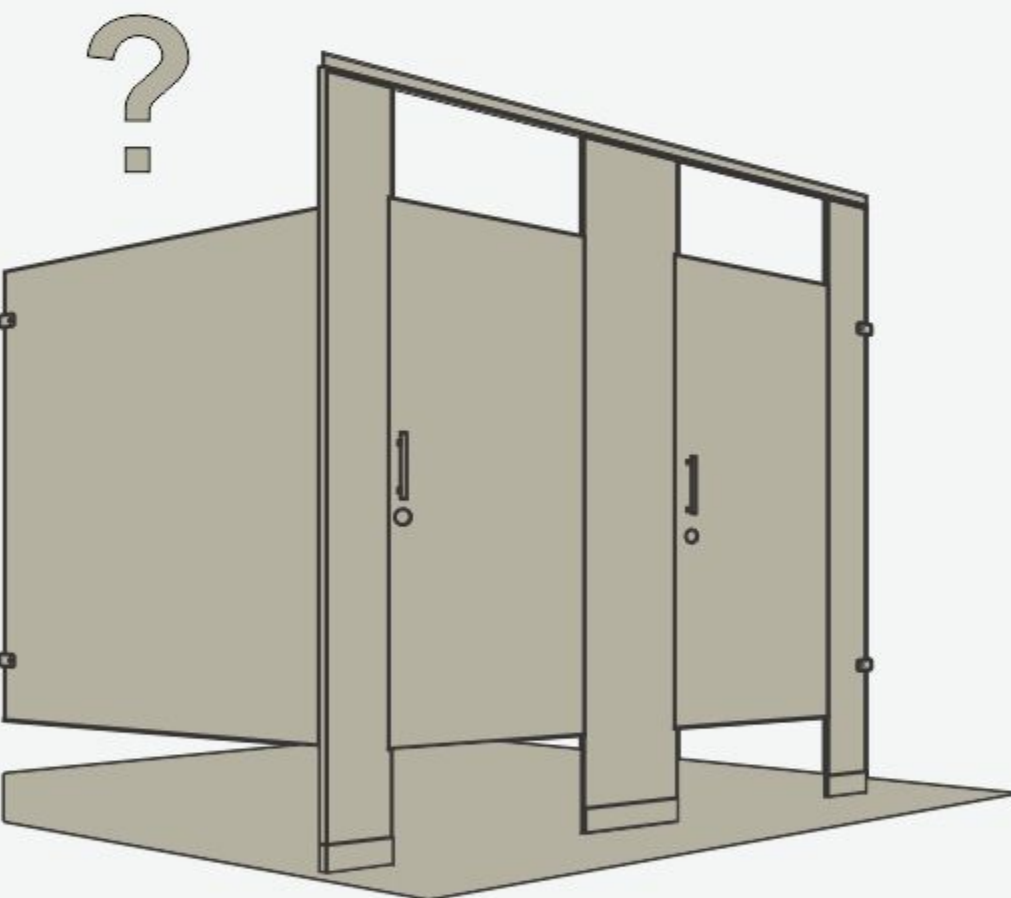

Shoes not Secured
From the backside of
the pilaster, drill through
the shoe and secure
with the provided
fastener.

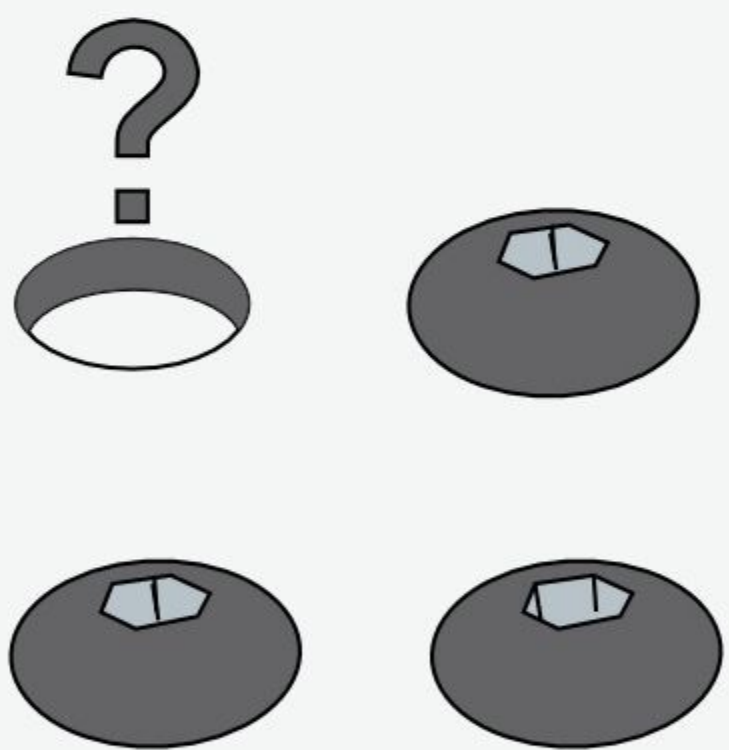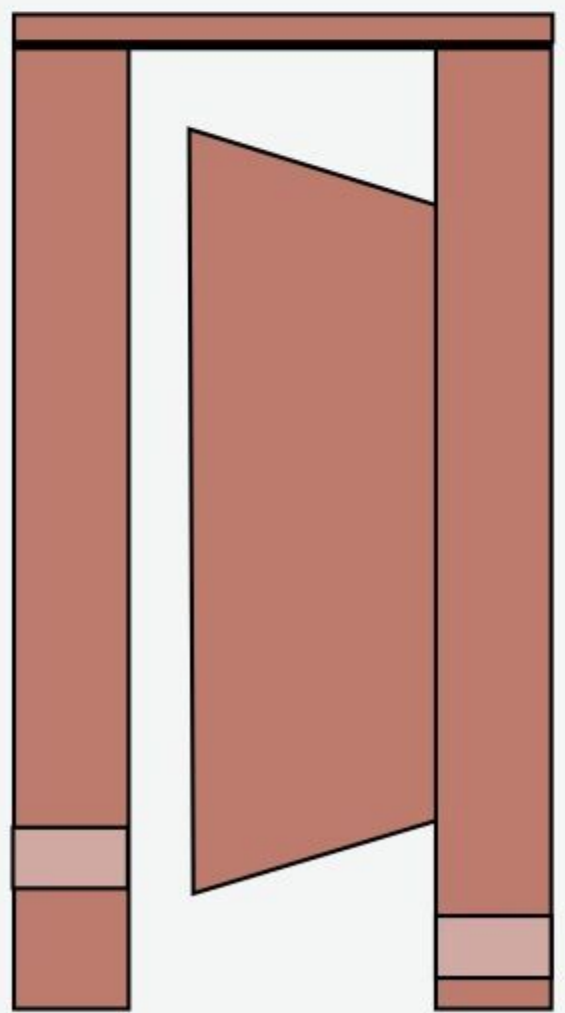

Missing Fasteners
Check brackets,
headrail, shoes, hinges,
latches, hooks, and
bumpers for missing
screws. Install missing
fasteners as required.