


# Tech Data: Floor Mount

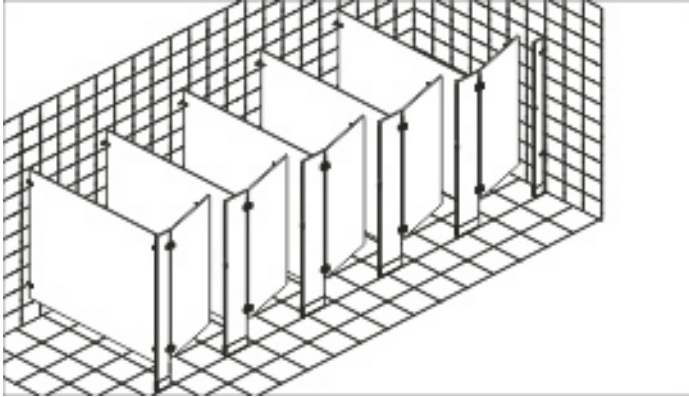

## Floor Mount Style

This style is mounted to the floor and is recommended for areas where the aesthetics of this style are desired. It requires a minimum 3" concrete floor for anchoring.

## Pilasters

The floor edge of the pilaster shall be provided with a mechanically fastened 3/8" steel leveling bar. Pilasters are attached to the floor using 3/8" expanding anchors, hex nuts, and washers to provide vertical and horizontal adjustments. Shoes are 22 gauge ASTM A-167 stainless steel with satin finish, not less than 3" in height.

## Door Hardware

Hinges are surface mount and strikes/keepers are wraparound style. Slide latches, coat hooks, and bumpers are surface mounted. Door pulls are through bolted. All fasteners are tamper proof.

## Brackets

Stirrup-type one ear, two-ear, and u-brackets are provided with theft resistant fasteners.

## Considerations

- Floor mount systems may not be suitable with post tension, radiant heat, or wood floors.

4/11/2014

Ironwood Manufacturing reserves the right to make changes in design, material, and documentation without formal notice and without incurring obligation. Consult local and national codes: conformity and compliance to local and national codes is the responsibility of the installer. Verify all rough-in dimensions prior to installation

