


Tech Data: Floor to Ceiling

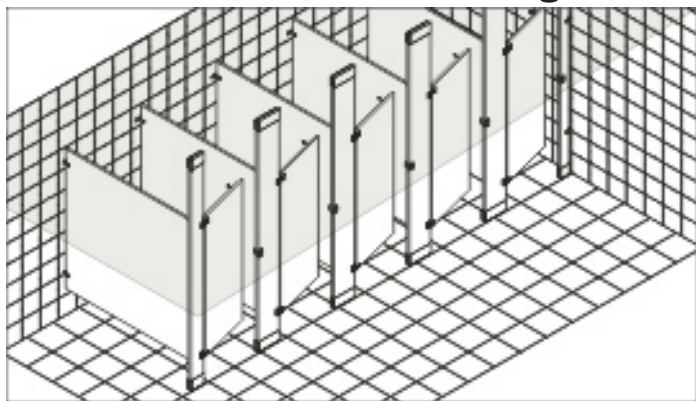

Floor to Ceiling Style

This style is mounted to the floor and ceiling and is recommended where additional stability is desired. Not recommended for ceiling heights over 8 feet.

Pilasters

A leveling bolt is provided on the floor edge of the pilaster. Pilasters are attached to the floor and ceiling using an 18 gauge galvanized steel plate to provide horizontal adjustment. Shoes are 22 gauge ASTM A-167 stainless steel with satin finish, not less than 3" in height.

Door Hardware

Hinges are surface mount and strikes/keepers are wraparound style. Slide latches, coat hooks, and bumpers are surface mounted. Door pulls are through bolted. All fasteners are tamper proof.

Brackets

Stirrup-type one ear, two-ear, and u-brackets are provided with theft resistant fasteners.

Considerations

- Floor to ceiling systems may not be suitable with ceilings over 96".
- Floor to ceiling systems may not be suitable with suspended ceilings.

4/11/2014

Ironwood Manufacturing reserves the right to make changes in design, material, and documentation without formal notice and without incurring obligation. Consult local and national codes: conformity and compliance to local and national codes is the responsibility of the installer. Verify all rough-in dimensions prior to installation.