


# Tech Data: Headrail Braced

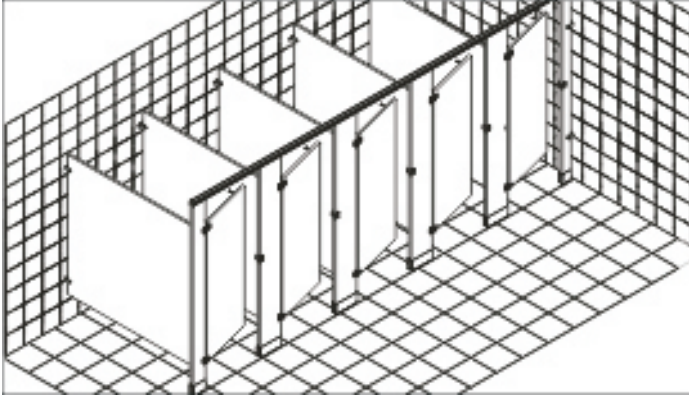

## Headrail Braced Style

The partition is attached to the floor and stabilized at the top of the pilaster with anti-grip headrail. This style is very stable and is recommended for heavy traffic areas.

## Pilasters

A leveling bolt is provided on the floor edge of the pilaster. Pilasters are attached to the floor using an 18 gauge galvanized steel plate to provide horizontal adjustment. Shoes are 22 gauge ASTM A-167 stainless steel with satin finish, not less than 3" in height.

## Door Hardware

Hinges are surface mount and strikes/keepers are wraparound style. Slide latches, coat hooks, and bumpers are surface mounted. Door pulls are through bolted. All fasteners are tamper proof.

## Brackets

Stirrup-type one ear, two-ear, and u-brackets are provided with theft resistant fasteners.

## Headrail

Headrail is extruded, clear, anodized aluminum with an anti-grip profile.

## Considerations

- Alcoves over 84" may require headrail cross bracing.