


Tech Data: Ceiling Hung

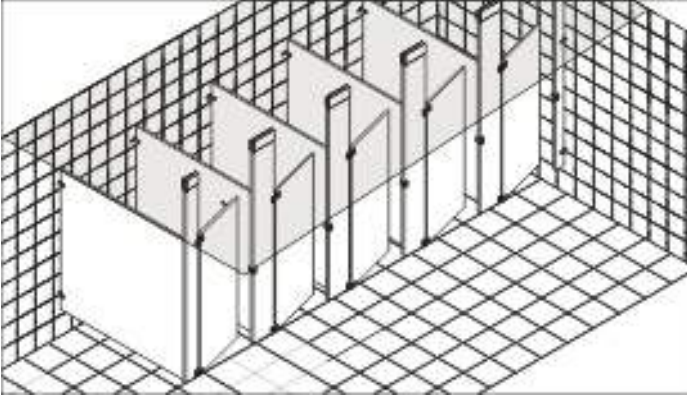

Ceiling Hung Style

This style is mounted to the ceiling and is recommended where complete floor access is desired. Requires pre-installed structural ceiling support and is not recommended for ceiling heights over 8'.

Pilasters

The ceiling edge of the pilaster shall be provided with a mechanically fastened 3/8" steel leveling bar. Pilasters are attached to the ceiling using 3/8" threaded rod, hex nuts, and washers to provide vertical and horizontal adjustments. Shoes are 22 gauge ASTM A-167 stainless steel with satin finish, not less than 3" in height.

Door Hardware

Hinges are surface mount and strikes/keepers are wraparound style. Slide latches, coat hooks, and bumpers are surface mounted. Door pulls are through bolted. All fasteners are tamper proof.

Brackets

Stirrup-type one ear, two-ear, and u-brackets are provided with theft resistant fasteners.

Considerations

- Ceiling hung systems will likely require ongoing adjustments to perform properly.
- Structural steel must be set within 2" of pilaster connection.
- Pedestals may be added to provide additional stability.

4/11/2014

Ironwood Manufacturing reserves the right to make changes in design, material, and documentation without formal notice and without incurring obligation. Consult local and national codes: conformity and compliance to local and national codes is the responsibility of the installer. Verify all rough-in dimensions prior to installation.