

DESCRIPTION

Compact laminate (CPL) toilet partition components are produced by cutting, machining and banding CPL sheets. Compact laminate is an excellent performing material for restroom partitions. It is durable and available in a extensive range of patterns, solids and wood grains.

CONSIDERATIONS

Horizontal grain applications require consultation.

Directional patterns have a maximum single, non-splice component width of 60 inch. Non-directional patterns cannot exceed 60 inch in two directions.

CPL should always be stored flat prior to installation.

CPL is ordered as required. Before selecting consider lead time requirements.

CONSTRUCTION

Compact Laminate: thickness used include 1", 3/4", 1/2", 1/4"

Edge: all edges banded with coordinating PVC banding.

Connections: U type brackets are mounted using stainless steel sheet metal screws, all others use stainless steel thru-bolts.

DIMENSIONS

Headrail braced pilaster heights are 82 inch with 58 and 72 inch doors and 94.5 inch tall with 84 inch doors.


Floor to ceiling pilaster heights are 1 inch less than floor to ceiling height to allow for hardware.

Panel height will match selected door height. Panels are available from 3 to 60 inches wide.

Available Door Width	
inch	mm
24	610
34	864
36	914

Available Panel and Door Height	
inch	mm
58	1473
72	1829
84	2134

Standard Wood Veneer Pilaster Widths																
inch	3	4	5	6	7	8	9	10	12	14	16	18	20	22	24	30
mm	76	102	127	152	178	203	229	254	305	356	406	457	508	559	610	762

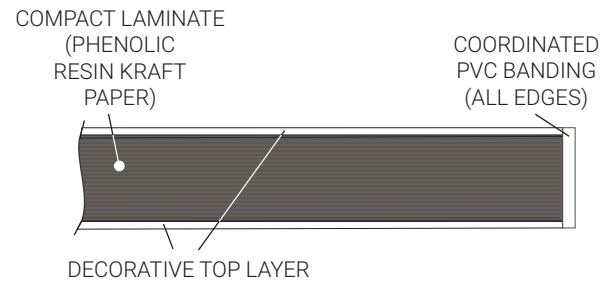

COMPACT LAMINATE
CROSS SECTION