

DESCRIPTION

Wood veneer (WV) toilet partition components are produced by gluing wood veneer sheets to an engineered wood core. These sheets are machined, cut to size, sanded and finished. Wood veneer components are finished using conversion varnish. Available wood species and staining combinations provide unmatched design and coordination opportunities.

CONSIDERATIONS

WV is not suitable for use in wet, steam and/or high abuse locations.

Excessive fluids should be avoided during cleaning.

Horizontal grain applications require consultation

Budgets should be reviewed prior to specifying wood veneer.

All components will have natural variations in pattern, color and sheen. Replacement components will have greater variations.

CONSTRUCTION

Wood Veneer: .039 thick solid wood veneer and duraback sheet.

Core: 45lb engineered wood board.

Sheet adhesive: poly-vinyl acetate.

Edge: matching wood veneer banding is applied using PUR adhesive.


Components are individually sanded, stained, and top coated with conversion varnish.

DIMENSIONS

Headrail braced pilaster heights is 82 inch with 58 and 72 inch doors and 94.5 inch tall with 84 inch doors.

Floor to ceiling pilaster heights are 1 inch less than floor to ceiling height to allow for hardware.

Panel height will match selected door height. Panels are available from 3 to 60 inches wide.

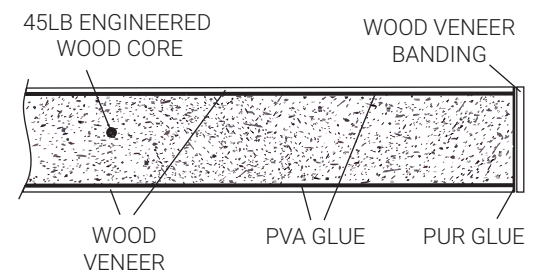

WOOD VENEER
COSS SECTION

Available Door Width	
inch	mm
24	610
34	864
36	914

Available Panel and Door Height	
inch	mm
58	1473
72	1829
84	2134

Standard Wood Veneer Pilaster Widths																
inch	3	4	5	6	7	8	9	10	12	14	16	18	20	22	24	30
mm	76	102	127	152	178	203	229	254	305	356	406	457	508	559	610	762