

Door Edge - Flat

DESCRIPTION

The Flat Edge style is clean, durable and cost effective. Edges are banded for uniformity and protection. The banding is machine applied to provide a smooth and clean appearance. PUR adhesive is used to increase moisture resistance. Adjustable, in field, door gaps accommodate greater variety of field conditions without requiring modification or replacement.


CONSIDERATIONS

Door/pilaster gaps will be present. Minimally 3/8 inch on the strike side and 1/8 inch on the hinge side.

Door/pilaster gaps allow for greater installation flexibility.

Ease of cleaning is increased with no inside corner.


Budget friendly price.

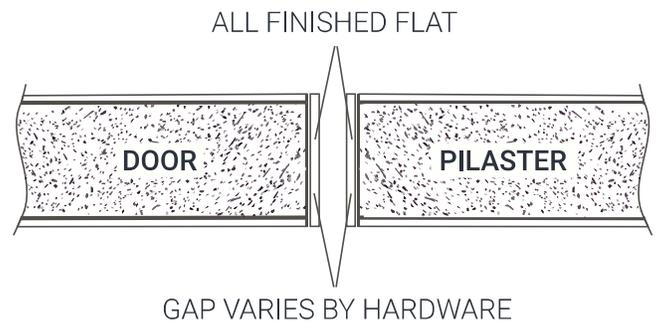

CONSTRUCTION

Flat Edge: doors and pilasters are cut to size and banding is applied in a single strip, full length of the component.

Edge finishing: flat edges are wrapped with a matching, .018 (.5mm) thick edge band and adhered using PUR adhesive. Banding is applied, trimmed, and buffed to remove sharp edges and maintain color.

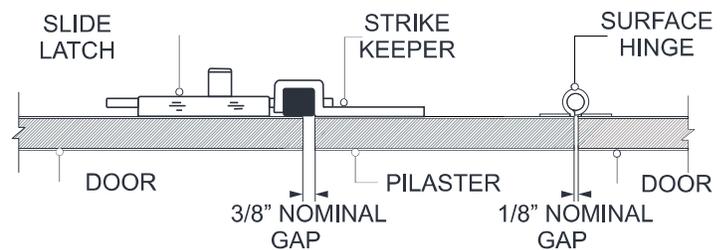

DIMENSIONS

Door/Pilaster Thickness by Material		
	inch	mm
High Pressure Laminate	1.25	32
Wood Veneer	1.25	32
Compact Laminate (slab)	.75	19
Compact Laminate (stile & rail)	1.0	25