

DESCRIPTION

Flat Panel doors are constructed from a single sheet of core material. The decorative top sheet is laminated to the core with heat, pressure, and adhesive or resins. Slab doors are the simplest and least expensive door style and they provide a clean, flush, and unbroken appearance to the partition system.

CONSIDERATIONS

Hinges are visible from outside of out-swinging doors. Hinge fasteners are visible from the outside of in-swinging doors.

Regular cleaning should be performed with minimal amounts of fluids.

ADA guidelines should be considered and reviewed before laying out system

Wet area applications require appropriate material selection.


CONSTRUCTION

Door: cut from single sheet of material.

Edge: all edges are banded with PVC banding affixed using PUR adhesive.

Size: doors are available in 24, 34 and 36 inch wide. and 58, 72, and 84 inch tall.

Net size: door is cut to allow for hinge and strike clearance

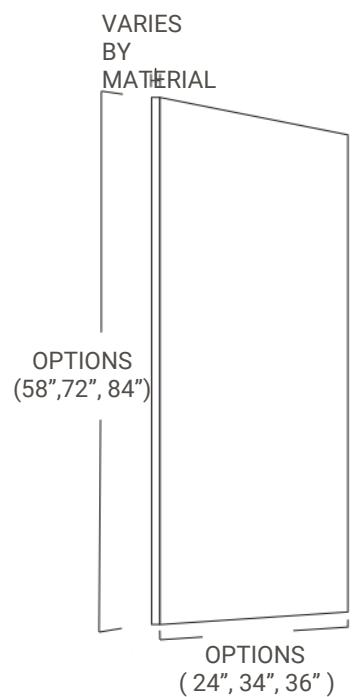


DIMENSIONS


Door Thickness	inch	mm
High Pressure Laminate	1.25	32
Wood Veneer	1.25	32
Compact Laminate	.75	19

Available Door Width	
inch	mm
24	610
34	864
36	914

Available Door Height	
inch	mm
58	1473
72	1829
84	2134

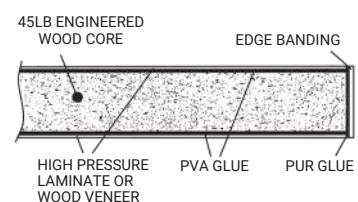

HIGH PRESSURE LAMINATE AND WOOD VENEER CROSS SECTION

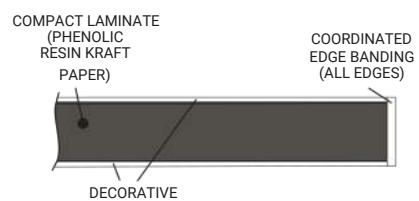

COMPACT LAMINATE CROSS SECTION